




## Description



This acoustic siren is suitable for applications where there is a high background noise and it is suitable also to be installed in hazardous area, zone 1 and 2.

- > Aluminum body and cover without copper
- > Screws in AISI 304
- > An entrance hole Ø 3/4 "ISO 7/1"
- > Explosion proof protection rating:
- > II 2 G Ex dIIC or IIB+H2 T3 or T4 Gb
- > II 2 D Ex tb III T150°C or T130° Db
- > Protection rating: IP65

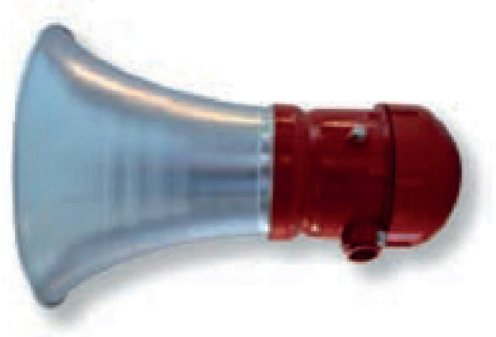

## General Technical Data

Power supply	12 + 24 Vac/Vcc
Power	16 W
Measure Range	Db 110
Acoustic frequency	440 + 2000 Hz
Service	continuous
Weight	Kg. 3,7
Operating temperature	- 50 °C + + 60 °C

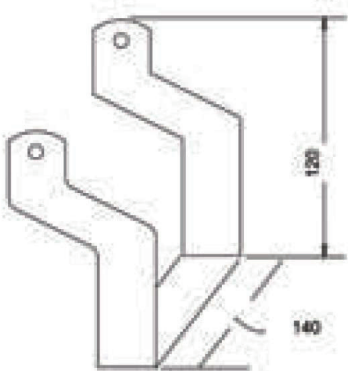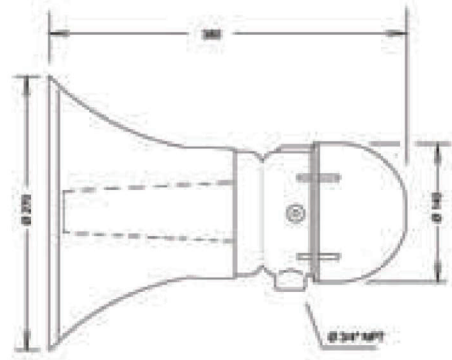

Accessories: ST320 plastic support bracket