

Description

SafeCable digital linear heat detection (LHD) cable is a combination of advanced polymer and digital technologies that can detect heat anywhere along its entire length. SafeCable is also compatible with any listed addressable or conventional panel.

At the core of SafeCable is a twisted pair of extremely low resistance (.05 ohm/ft. [.164 ohms/m] of twisted cable) trimetallic conductors, sheathed in new advanced thermal polymers. These polymers are chemically engineered to break down at specific fixed temperatures allowing the twisted conductors to make contact and initiate an alarm at the control panel without any calibration for changes in the ambient temperature. The distance locating option allows the control panel to identify and display the location, in feet or meters from the panel, where the heat source interacted with the detection cable.

The polymer used for the protective outer coating of SafeCable is chemically inert and UV protected. This allows for SafeCable to be used in an extremely wide variety of installations and hazards

Features


- > Up to 10,000 linear feet (3,048m) of SafeCable per zone
- > Approved for up to 35' (10.7m) spacing
- > .05 ohms/ft (.164 ohms/m) resistance for twisted pair wire, lower than any other type of linear heat detection wire
- > Compatible with ALL Fire Alarm Control / Releasing Panels
- > Use with addressable modules
- > Multiple alarm temperatures: 155°F (68°C), 172°F (78°C), 190°F (88°C), 220°F (105°C)
- > Distance locating available
- > Can detect anywhere along the entire length of wire
- > Multiple alarm temperatures can be mixed on the same zone
- > Total zone length replacement unnecessary after alarm
- > Longer standard spool lengths means less splicing
- > Custom lengths available

Applications

Use where other types of detection are not practical or where the location of an overheating condition must be known. SafeCable is ideal for aircraft hangars, switchgear, in-rack freezer and cooler storage, archive and warehouse storage, elevator shafts, cooling towers, conveyors, cable trays, cable spreading rooms, terminal rooms, in-cabinet, motors, pumps, generators, tunnels, bridges, parking decks and engine bays.



Technology

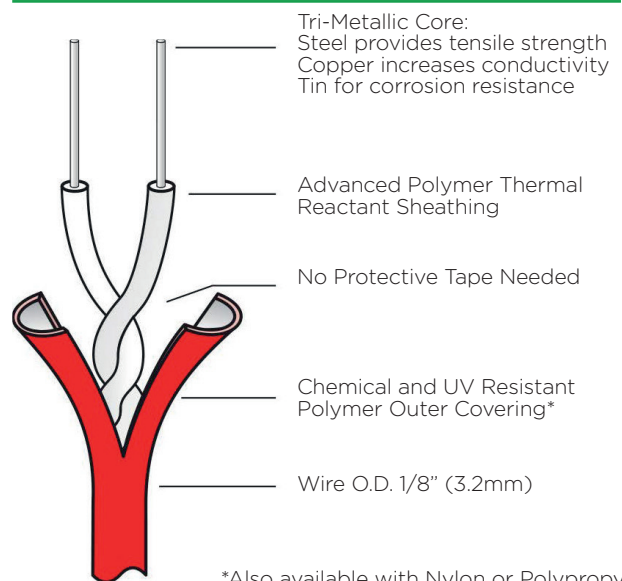

*Also available with Nylon or Polypropylene outer jackets, and with GuideWire.



ME A
ISO 9001 Registered

Maximum Listed Spacing

TEMPERATURE RATING	C-UL-US	FM
155°F (68°C)	35 ft. (10.7m)	35 ft. (10.7m)
155°F (68°C)	35 ft. (10.7m)	35 ft. (10.7m)
155°F (68°C)	35 ft. (10.7m)	35 ft. (10.7m)
155°F (68°C)	35 ft. (10.7m)	35 ft. (10.7m)

Maximum Ambient Temperatures

TEMPERATURE RATING	C-UL-US	FM
155°F (68°C)	35 ft. (10.7m)	35 ft. (10.7m)
155°F (68°C)	35 ft. (10.7m)	35 ft. (10.7m)
155°F (68°C)	35 ft. (10.7m)	35 ft. (10.7m)
155°F (68°C)	35 ft. (10.7m)	35 ft. (10.7m)

Specifications

Diameter	1/8" (3.2mm)
Weight Nominal	15 lbs./1000 ft. (6.8kg/305m)
Bend Radius	1/8" (3.2mm)
Max. Voltage Rating	1/8" (3.2mm)
Resistance:	1/8" (3.2mm)
Temperature Ratings (°F)	1/8" (3.2mm)
Temperature Ratings (°C)	1/8" (3.2mm)
Sheathing Options:	PVC: Corrosive and UV resistant Nylon: Abrasion resistant Polypropylene: Chemical resistant
Optional Guidewire:	1/8" (3.2mm)

Optional Distance Locating


Optional Distance Locating The Distance Locating option available for SAFE Fire Detection's SafeCable system allows for identifying where the overheating condition occurred anywhere on the total length of cable in a particular zone. Unit displays the distance from the module to the overheating condition in both feet and meters.

The distance locating option may be used with any listed addressable or conventional system. Any listed 24VDC power source may be used to power the distance locating module. For additional details, please refer to the SafeCable Distance Locating Module (FDAPDL) cut sheet.



Installation Examples


Area Spacing

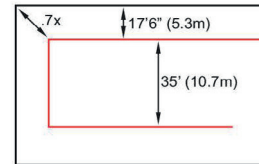


In-Rack




Conveyor Systems

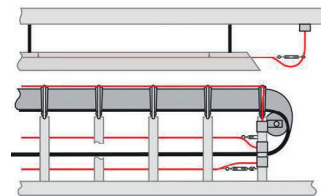


Equipment/Proximity

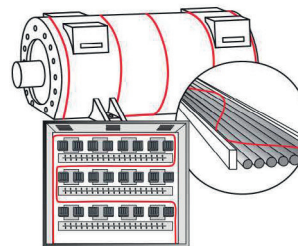

Floating Rooftop Tanks

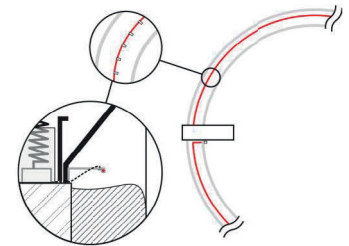

Tunnels / Subways

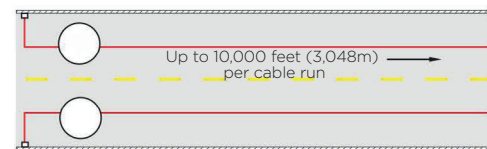

Cable with GuideWire for Extended Runs Using Minimal Support

